



NIKKELVERK

PLATING NICKEL

PRODUCT DESCRIPTION AND PACKAGING

Product Description


Nikkelverk is one of the largest suppliers of electrolytic NICKEL in the world. Through over one hundred years of participation in the industry and the development of NICKEL products to satisfy a wide range of applications, the name Nikkelverk nickel has become synonymous with quality, service and dependability.

Nikkelverk's quality is the result of research and innovative technology and is reflected in the consistent high purity of its NICKEL products.

Nikkelverk Plating Nickel has one of the lowest concentrations of total impurities of any commercially available Nickel.

For use as anodes in electroplating applications, the products are available as whole cathode, 25 mm, 50 mm and 100 mm squares.

Further information and assistance are available upon request and on the webpage www.glencore.com.

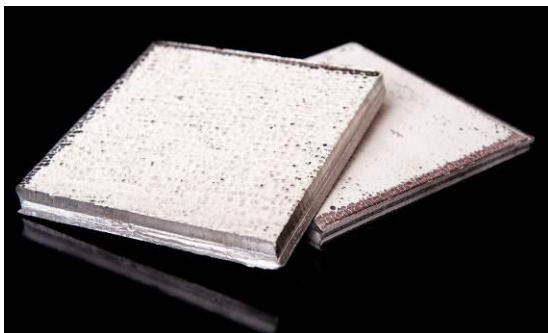


Typical Analysis

Nickel _____	> 99.98 %
Carbon _____	< 0.002 %
Cobalt _____	< 0.0002 %
Copper _____	< 0.0001 %
Iron _____	< 0.001 %
Lead _____	< 0.0002 %
Sulphur _____	< 0.0002 %
Zinc _____	< 0.0002 %

Nikkelverk NICKEL is guaranteed to meet the chemical requirements of ISO 6283 grade R9995 and ASTM B39-79.

Bulk density of 25 mm and 100 mm squares:
Approx. 4.3 kg/dm³ and 3.6 kg/dm³

Safety Data Sheet available upon request.





Standard Sizes and Packaging

25 mm squares



- 4 x 250 kg steel drums, net weight 1,000 kg, strapped to a skidded wooden pallet.



- 100 x 10 kg polyethylene bags, net weight 1,000 kg, packed in a skidded wooden box.

50 mm squares



- 4 x 250 kg steel drums, net weight 1,000 kg, strapped to a skidded wooden pallet.



- 2,000 kg polypropylene bag ("Big bag"), strapped to a wooden pallet.

100 mm squares



- 4 x 200 kg steel drums, net weight 800 kg, strapped to a skidded wooden pallet.

Whole Cathode



- 1,280 x 720 mm whole untrimmed cathode, net weight approx. 1,000 kg, strapped to wooden skids.